


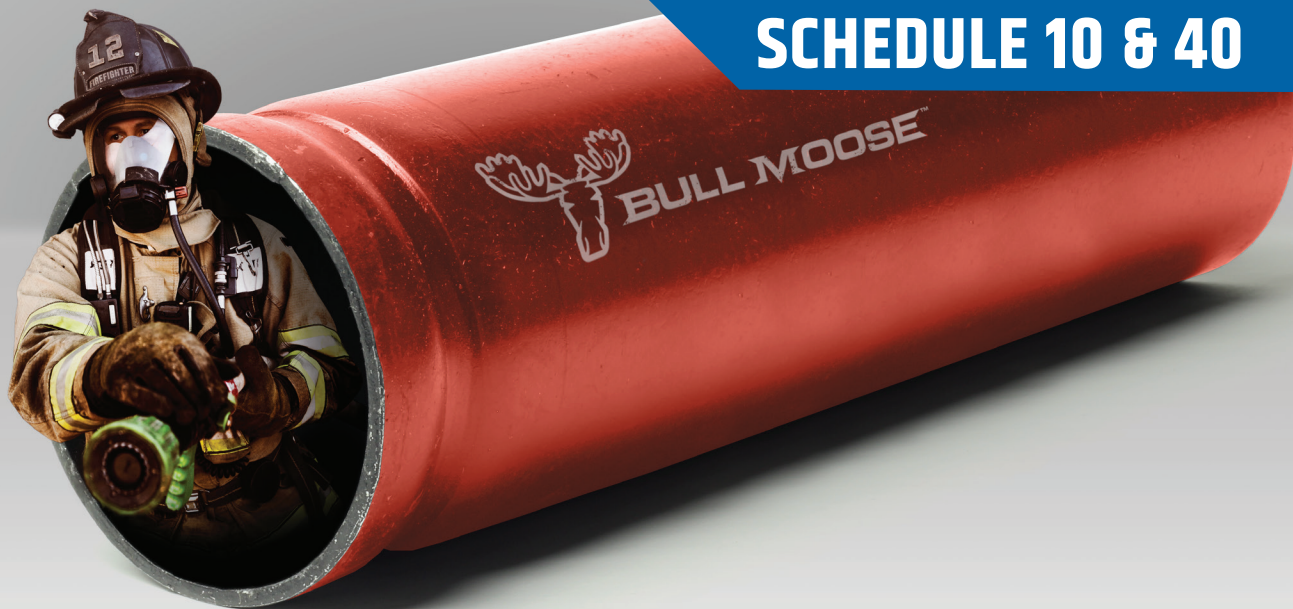

Always ready to protect your most valuable assets.

As the leading supplier of steel sprinkler pipe, we understand that there are no second chances in fire suppression. You need products of enduring quality and exceptional strength—plus reliable service. You need Bull Moose.

Bull Moose Fire Sprinkler Pipe Product Information

SCHEDULE 10	Nominal Pipe Size (Inches)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"	10"
	O.D. (in)	1.315	1.660	1.900	2.375	2.875	3.500	4.500	6.625	8.625	10.750
	I.D. (in)	1.097	1.442	1.682	2.157	2.635	3.260	4.260	6.357	8.249	10.374
	Empty Weight (lb/ft)	1.41	1.81	2.09	2.64	3.53	4.34	5.62	9.29	16.94	21.23
	Water Filled Weight (lb/ft)	1.800	2.518	3.053	4.223	5.893	7.957	11.796	23.038	40.086	57.874
	C.R.R.	15.270	9.910	7.760	6.270	4.920	3.540	2.500	1.158	1.805	2.410
	Pieces per Lift	91	61	61	37	30	19	19	10	7	2
	Lift Weight (lbs) 21' lengths	2,695	2,319	2,677	2,051	2,224	1,732	2,242	1,951	2,490	892
	Lift Weight (lbs) 24' lengths	3,079	2,650	3,060	2,344	2,542	1,979	2,563	2,230	2,846	1,019
	Lift Weight (lbs) 25' lengths	3,208	2,760	3,187	2,442	2,648	2,062	2,670	2,323	2,965	1,062
SCHEDULE 40	Nominal Pipe Size (Inches)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"	10"
	O.D. (in)	1.315	1.660	1.900	2.375	2.875	3.500	4.500	6.625	8.625	10.750
	I.D. (in)	1.049	1.380	1.610	2.067	2.469	3.068	4.026	6.065	7.981	9.981
	Empty Weight (lb/ft)	1.68	2.27	2.72	3.66	5.80	7.58	10.80	18.99	28.58	38.58
	Water Filled Weight (lb/ft)	2.055	2.918	3.602	5.114	7.875	10.783	16.316	31.498	50.27	69.05
	C.R.R.	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	Pieces per Lift	70	51	44	30	30	19	19	7	7	2
	Lift Weight (lbs) 21' lengths	2,470	2,431	2,513	2,306	3,654	3,024	4,309	2,792	4,201	1,019
	Lift Weight (lbs) 24' lengths	2,822	2,778	2,872	2,635	4,176	3,456	4,925	3,190	4,801	1,062
	Lift Weight (lbs) 25' lengths	2,940	2,894	2,992	2,745	4,350	3,601	5,130	3,323	5,002	1,062


SCHEDULE 10 & 40 ADVANTAGES:

- UL listed (US & Canada) and FM approved
- ASTM A135 and A795 Type E, Grade A Certified
- Complies with NFPA-13, 13R and 14
- Industry-leading hydraulic characteristics
- CRR of 1.0 and greater
- All pipe NDT weld tested
- UV coating
- Every length of our sprinkler pipe features large, easy-to-read stenciling, clearly identifying type, size, length, & heat number

Exclusive maker of Reddi-Pipe®
RED OR BLACK PAINTED PIPE.

OTHER BENEFITS/SERVICES:

- We have the most stocking locations in the industry, for best delivery and availability
- Plain end or roll groove
- Eddy Guard II™ bacterial-resistant internal coating
- Custom length options
- Hot dipped galvanization
- Reddi-Pipe® red or black pipe eliminates field painting
- Compatible for use in wet, dry, preaction and deluge sprinkler systems

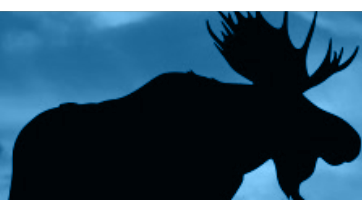

800.325.4467
sales@BullMooseIndustries.com
BullMooseTube.com